

Bond Breaker Tape

Polyethylene tape, for isolating sealants from concrete and joint fillers


USES

Used in joint sealing applications to ensure sealant only adheres to two faces of the joint.

Polyethylene tape for isolating sealant and eliminating adhesion to filler boards.


DESCRIPTION

A 125 micron Black HiTack Polyethylene construction tape that has excellent conformability to irregular surfaces. The Bond Breaker Tape provides an Anti electrolytic barrier between dissimilar metals and has good adhesion to most building materials.



APPLICATION INSTRUCTIONS

Clean joint surface, free from dust and other contaminants.

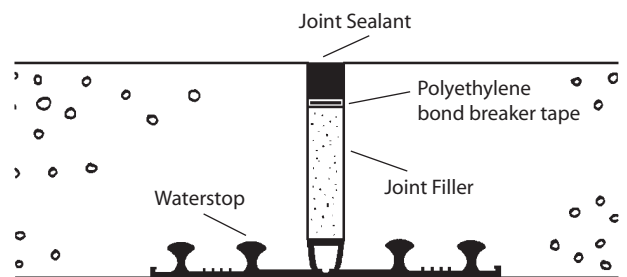

PACKAGING

66 m per roll, available in the following widths:

12 mm, 15 mm, 20 mm, 25 mm, 50 mm

STORAGE

Store in cool, dry conditions.

TECHNICAL SUPPORT

Parchem offers a comprehensive range of high performance, high quality construction products. Parchem offers a technical support package to specifiers and contractors as well as on-site technical advice from staff with experience in the construction industry.



PARCHEM	CONCRETE REPAIR	FLOORING	JOINTING SYSTEMS	WATERPROOFING
TECHNICAL DATA SHEET	SEPTEMBER 08			
www.parchem.com.au	7 Lucca Road, Wyong NSW 2259 Phone 1300 737 787			ABN 80 069 961 968 1

Bond Breaker Tape



ADDITIONAL INFORMATION

Parchem provides a wide range of complementary products which include:

- concrete repair – cementitious and epoxy
- grouts and anchors – cementitious and epoxy
- waterproofing membranes – liquid applied, cementitious and bituminous sheet membranes
- waterstops – pvc and swellable
- joint sealants – building, civil and chemical resistant
- industrial flooring systems – cementitious and epoxy
- architectural coatings
- filler boards – swellable cork, bituminous and backing rod
- ancillary products

For further information on any of the above, please consult with your local Parchem sales office.

IMPORTANT NOTICE

A Material Safety Data Sheet (MSDS) and Technical Data Sheet (TDS) are available from the Parchem website or upon request from the nearest Parchem sales office. Read the MSDS and TDS carefully prior to use as application or performance data may change from time to time. In emergency, contact any Poisons Information Centre (phone 13 11 26 within Australia) or a doctor for advice.

PRODUCT DISCLAIMER

This Technical Data Sheet (TDS) summarises our best knowledge of the product, including how to use and apply the product based on the information available at the time. You should read this TDS carefully and consider the information in the context of how the product will be used, including in conjunction with any other product and the type of surfaces to, and the manner in which, the product will be applied. Our responsibility for products sold is subject to our standard terms and conditions of sale. Parchem does not accept any liability either directly or indirectly for any losses suffered in connection with the use or application of the product whether or not in accordance with any advice, specification, recommendation or information given by it.



PARCHEM	CONCRETE REPAIR	FLOORING	JOINTING SYSTEMS	WATERPROOFING
TECHNICAL DATA SHEET	SEPTEMBER 08			
www.parchem.com.au	7 Lucca Road, Wyong NSW 2259	Phone 1300 737 787		ABN 80 069 961 968
				2