

## PRECISION FLAT FLOOR TOOLS



These extruded magnesium flat floor tools are specifically designed to improve floor or pavement flatness. Each tool comes standard with three 1.8 m clip-together aluminum handles, stabilising outriggers and equalizer pitch adjusting head for precise, even control.

### BUMP CUTTER


Cuts down bumps and fills low areas after concrete slab has been floated.

### CHECK ROD

Reduces bumps and fills low areas while the concrete is still plastic.

### CHANNEL FLOAT

Use in place of traditional bull floats for flatter floors.

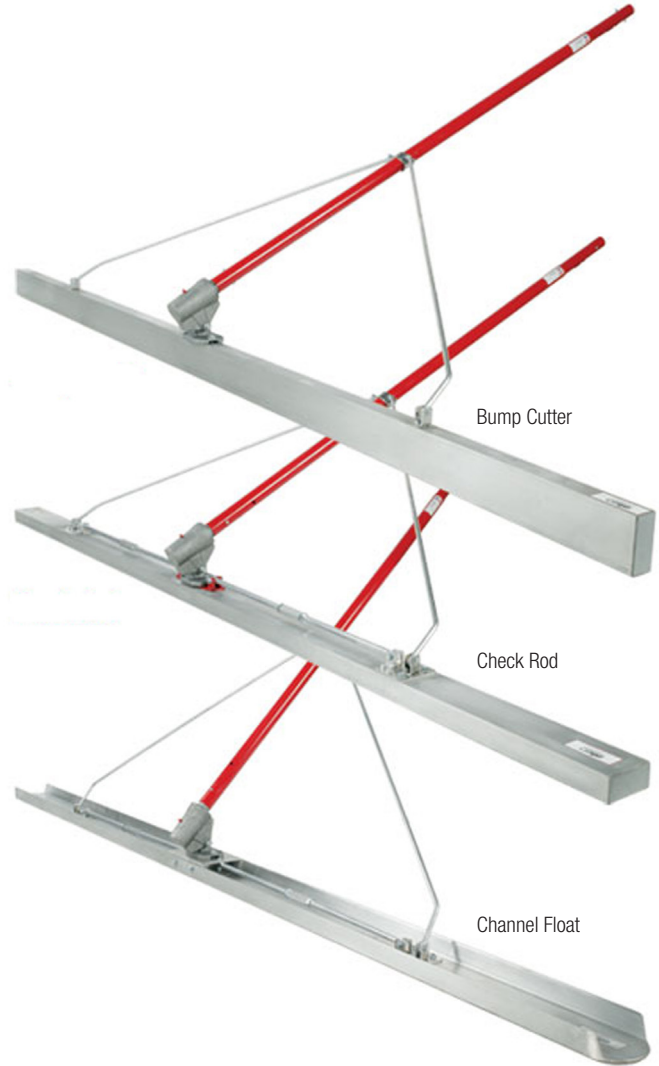

		BUMP CUTTER	CHECK ROD	CHANNEL FLOAT
Product Code		FR-3000BC	FR-3000CR	FR-3000CF
Operating Weight	kg	12	14	17
Extrusion Length	m (ft)	3.1 (10')	3.1 (10')	3.1 (10')
Dimensions (w x h)	mm (in)	51 x 102 (2' x 4')	102 x 51 (4' x 2')	152 x 51 (6' x 2')